

# RD-2

# SCA



### Performance

A larger compressor increases display case productivity

- RD-2 utilize a 1.0 HP compressor

### Shelf Configurations (6)

Increase product capacity with multiple shelf configurations

- RD-2 provides a total of 6 selling surfaces and over 26 cubic feet of product space

### Lighting

Improved lighting creates an attractive selling environment while showcasing available products

### Product Display

Glass end plates and two position shelving improve visual presentation and increase "impulse-buy" sales



### Refrigeration System

Holds desired product temperatures while cold air recirculation system seals in freshness and extends product shelf life

### Space Saving Design

Versatile design allows for a wide variety of unit placement options

- RD-2 designed for back to back aisle, wall, or end-cap display placement

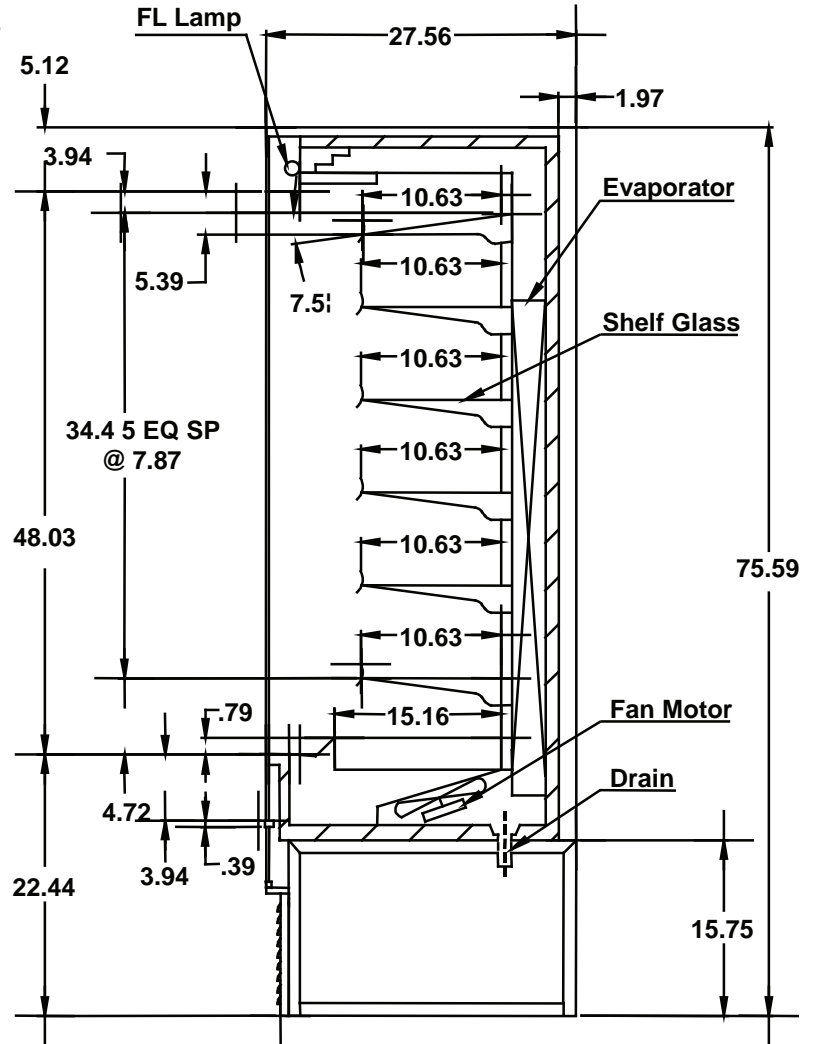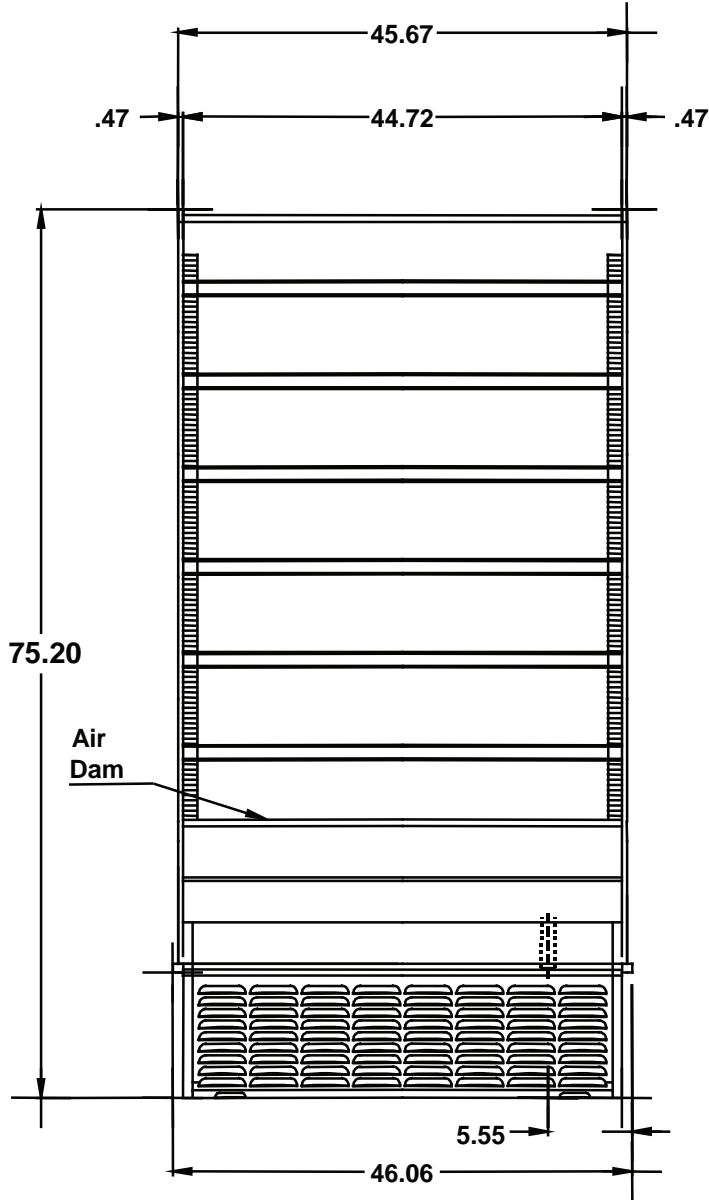

NEMA 6-15R    NEMA 14-20P

\* Either plug available

## SPECIFICATIONS

RD-2 SELF CONTAINED REFRIGERATED DISPLAY		
<b>Product Temperature</b>	Below 40°F	
<b>Environmental Conditions</b>	75°F, 55% relative humidity, maximum air velocity = 60 ft/min	
<b>External Dimensions</b>	<b>Height</b>	75.59"
	<b>Width</b>	45.67"
	<b>Depth</b>	27.56"
<b>Shelves (6 Total)</b>	10.63"D x 44.7" L	
<b>Structure</b>	<b>Outer Box</b>	Glass & baked acrylic resin finish on electrolytic zinc-coated steel
	<b>Inner Box</b>	Baked acrylic resin finish on electrolytic zinc-coated steel
	<b>Insulation</b>	Rigid polyurethane foam
<b>Electrical Parts 115V 60Hz Single-Phase</b>	<b>Evaporator Fan Motor</b>	6 Watts, 3 each
	<b>Lighting</b>	25 Watts, 0.39 Amp
<b>Electrical Parts 230V 60Hz Single-Phase</b>	<b>Compressor &amp; Condenser Fan Motor</b>	1.0HP, 8.5 Amp
<b>Refrigerant</b>	R-22	
<b>Evaporator</b>	Fin-tube type	
<b>Expansion Valve</b>	Internally Equalized Automatic Thermal-Expansion Valve	
<b>Solenoid Valve</b>	Hermetic Direct Acting Type Solenoid Valve for Refrigeration	
<b>Thermostat</b>	Electronic-Defrost on Demand (10 - 30 minutes, every 2 hours)	
<b>Drain Pipe Dimension</b>	1.25" copper tube	
<b>Internal Volume</b>	26.4 cubic feet	
<b>Weight</b>	560 lbs.	
<b>Noise</b>	< 65 DB at 3.3 ft.	
<b>Agency Approvals</b>	UL, UL NSF	
<b>Top Shelf Tilt</b>	7.5°	

NOTE: The manufacturer reserves the right to make product improvements and change specifications without notice.



# IMPULSE SERIES

Refrigerated Display Cases